


Lightweight, telescopic masts with attached tripod for directional or omni-directional headloads

FT masts are typically field masts derived from the well-known QT mast range.

Easy and quick to deploy, manually or with handpump and supported with three foldable legs which are permanently attached to the mast.

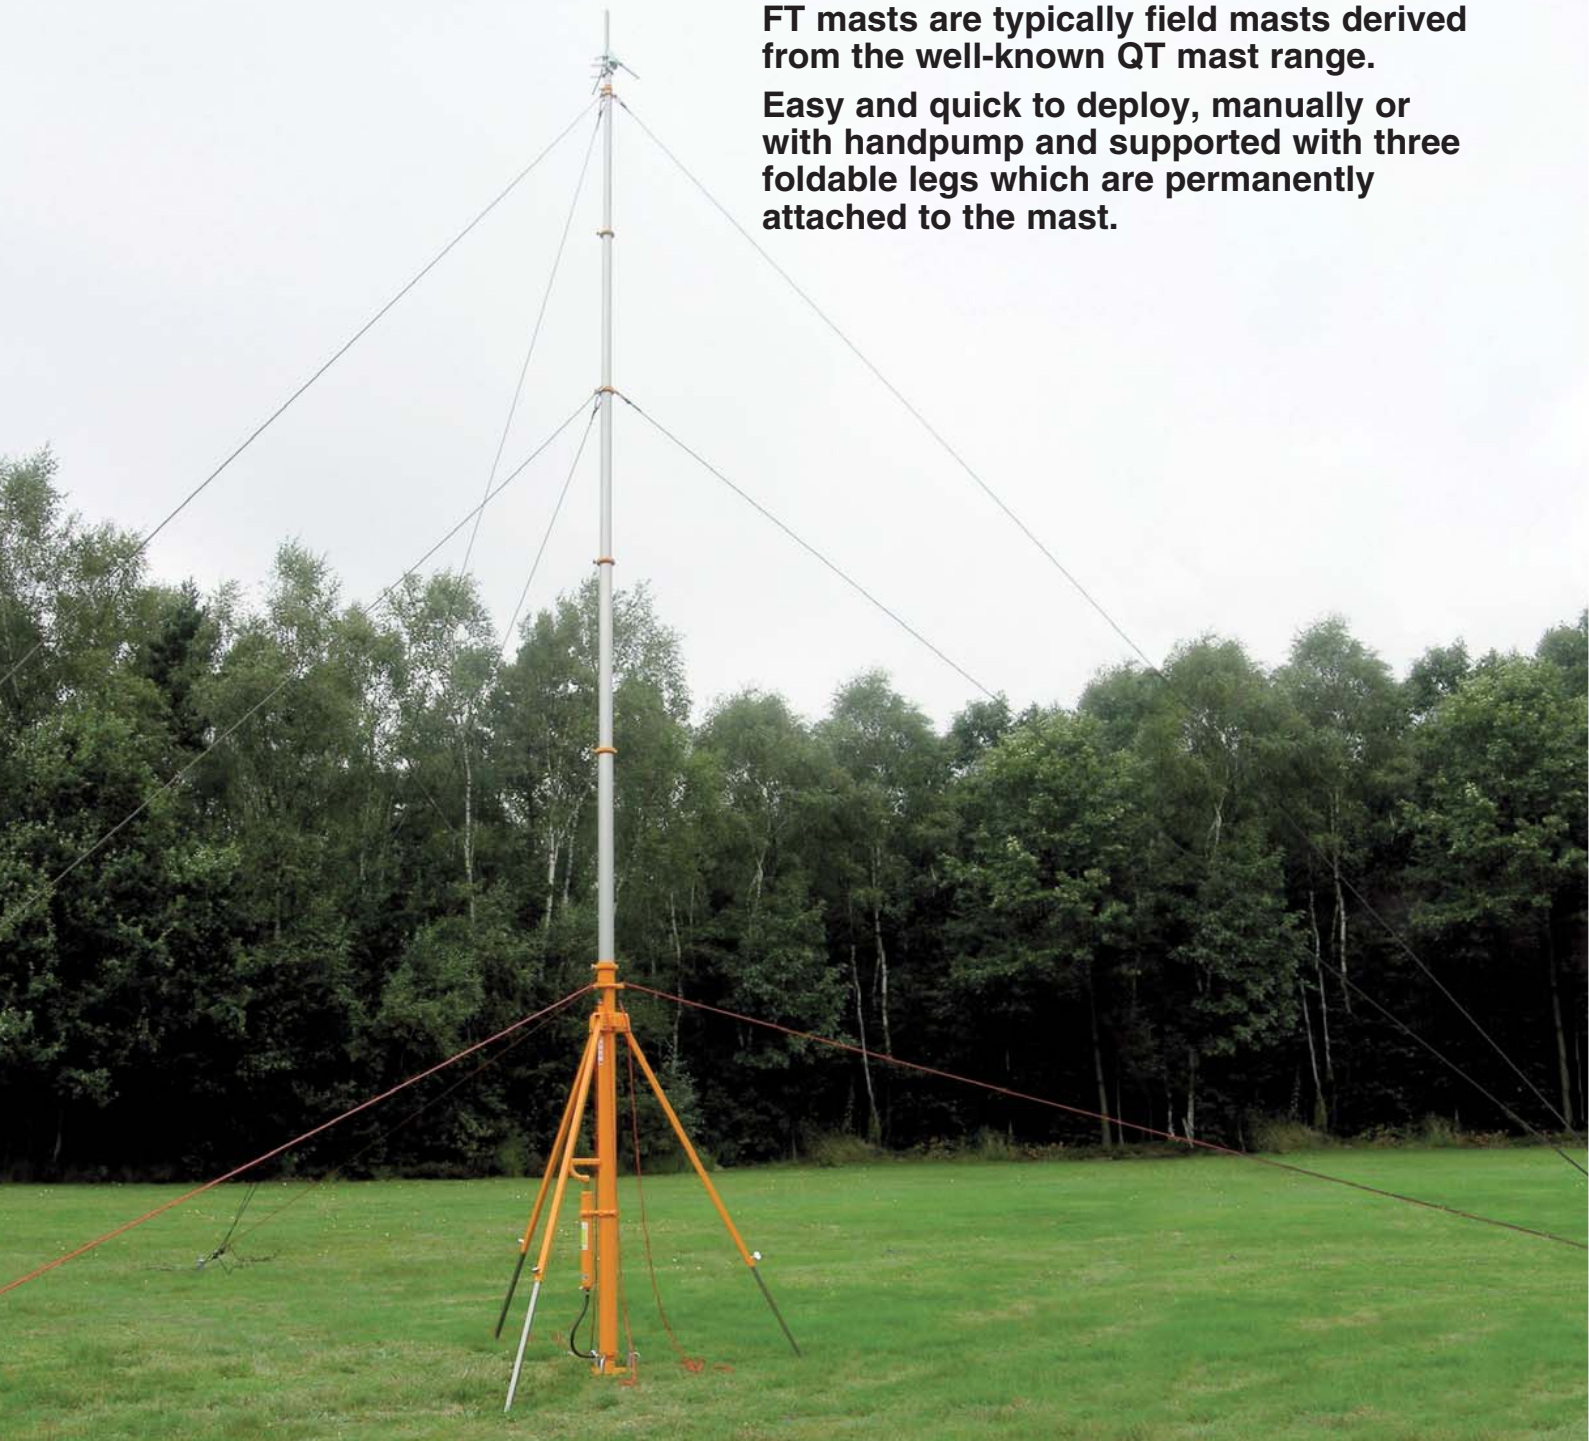

Technical Details

Silent, smooth and easy operation



PHOTO SHOWS CSFT-R3-3/H MAST (MANUALLY EXTENDED)

The features that have made it such an attractive and useful piece of equipment are :

1. Aluminium alloy sections
2. Handpump (not for manually extended masts)
3. Field base
4. Leg clamp
5. Air-release screw (not for manually extended masts)
6. Section-clamping screws
7. Guy collar
8. Turning Collar
9. Quick-clamp for headload



PHOTO SHOWS CSFT-R6-6/HP MAST

Standard FT Mast Range

Non-Rotatable FT Mast Range (extended with handpump)

3" / 76,2mm BASE TUBE

| Mast Model | Cat. No. | Retracted Height | Extended Height | Standard Finish | Max. Headload | Mast Guying Kit Cat. No. |
|------------------------|----------|------------------|-----------------|---------------------------------|---------------|--------------------------|
| 3 section masts | | | | | | |
| SFT3-3/HP | 27674 | 1,42 m | 3,25 m | natural anodised & yellow paint | 20,0 kg | 33530-SG |
| 4 section masts | | | | | | |
| SFT4-4/HP | 27676 | 1,44 m | 4,15 m | natural anodised & yellow paint | 20,0 kg | 33531-SG |
| 5 section masts | | | | | | |
| SFT5-5/HP | 27680 | 1,48 m | 5,10 m | natural anodised & yellow paint | 15,0 kg | 33532-SG |
| 6 section masts | | | | | | |
| SFT6-6/HP | 27685 | 1,51 m | 6,05 m | natural anodised & yellow paint | 10,0 kg | 33533-SG |
| SFT9-6/HP | 27696 | 2,05 m | 8,80 m | natural anodised & yellow paint | 10,0 kg | 33536-SG |
| SFT10-6/HP | 27700 | 2,29 m | 10,00 m | natural anodised & yellow paint | 10,0 kg | 33537-SG |
| 7 section masts | | | | | | |
| SFT7-7/HP | 27688 | 1,54 m | 6,95 m | natural anodised & yellow paint | 6,0 kg | 33534-SG |
| SFT11-7/HP | 27704 | 2,22 m | 11,05 m | natural anodised & yellow paint | 4,5 kg | 33538-SG |
| 8 section masts | | | | | | |
| SFT8-8/HP | 27692 | 1,58 m | 7,90 m | natural anodised & yellow paint | 4,5 kg | 33535-SG |
| SFT12-8/HP | 27708 | 2,12 m | 11,60 m | natural anodised & yellow paint | 2,5 kg | 33539-SG |

Rotatable FT Mast Range (extended with handpump)

3" / 76,2mm BASE TUBE

| Mast Model | Cat. No. | Retracted Height | Extended Height | Standard Finish | Max. Headload | Mast Guying Kit Cat. No. |
|------------------------|----------|------------------|-----------------|------------------|---------------|--------------------------|
| 3 section masts | | | | | | |
| CSFT-R3-3/HP | 27886 | 1,48 m | 3,30 m | natural anodised | 20,0 kg | 33720-SG |
| 4 section masts | | | | | | |
| CSFT-R4-4/HP | 27888 | 1,54 m | 4,20 m | natural anodised | 20,0 kg | 33721-SG |
| 5 section masts | | | | | | |
| CSFT-R5-5/HP | 27892 | 1,55 m | 5,10 m | natural anodised | 15,0 kg | 33722-SG |
| 6 section masts | | | | | | |
| CSFT-R6-6/HP | 27896 | 1,58 m | 6,05 m | natural anodised | 10,0 kg | 33723-SG |
| CSFT-R9-6/HP | 27908 | 2,07 m | 8,80 m | natural anodised | 10,0 kg | 33726-SG |
| CSFT-R10-6/HP | 27912 | 2,33 m | 10,05 m | natural anodised | 10,0 kg | 33727-SG |
| 7 section masts | | | | | | |
| CSFT-R7-7/HP | 27900 | 1,62 m | 7,00 m | natural anodised | 6,0 kg | 33724-SG |
| CSFT-R11-7/HP | 27916 | 2,29 m | 11,05 m | natural anodised | 4,5 kg | 33728-SG |
| 8 section masts | | | | | | |
| CSFT-R8-8/HP | 27904 | 1,65 m | 7,95 m | natural anodised | 4,5 kg | 33725-SG |
| CSFT-R12-8/HP | 27920 | 2,13 m | 11,60 m | natural anodised | 2,5 kg | 33729-SG |

Rotatable FT Mast Range (manually extended)

3" / 76,2mm BASE TUBE

| Mast Model | Cat. No. | Retracted Height | Extended Height | Standard Finish | Max. Headload | Mast Guying Kit Cat. No. |
|------------------------|----------|------------------|-----------------|------------------|---------------|--------------------------|
| 3 section masts | | | | | | |
| CSFT-R3-3/H | 27960 | 1,44 m | 3,05 m | natural anodised | 10,0 kg | 33720-SG |
| 4 section masts | | | | | | |
| CSFT-R4-4/H | 27962 | 1,47 m | 4,05 m | natural anodised | 10,0 kg | 33721-SG |
| 5 section masts | | | | | | |
| CSFT-R5-5/H | 27964 | 1,50 m | 5,05 m | natural anodised | 10,0 kg | 33722-SG |
| 6 section masts | | | | | | |
| CSFT-R6-6/H | 27966 | 1,53 m | 6,00 m | natural anodised | 10,0 kg | 33723-SG |

FT Masts Mounting Accessories

FT Mast Guying Kits

For all FT Series masts is a Mast Guying Kit available consisting of Spikes, Canvas Top Cover, Pickets, Hammer, Radius Line, Top guys + Middle Guys (if applicable) and Accessory Bag.



FT Mast Carrying Bags

The FT Series masts are also available with an optional carrying bag to simplify transport or just for protection of the stored mast.

FT Mast Carrying Bags for non-rotatable masts (extended with handpump)

| Mast Carrying Bags internal length | Cat. No. |
|------------------------------------|----------|
| 1450 mm | 30220-SG |
| 1500 mm | 30221-SG |
| 1550 mm | 30222-SG |
| 1600 mm | 30223-SG |
| 2100 mm | 30225-SG |
| 2160 mm | 30226-SG |
| 2250 mm | 30227-SG |
| 2400 mm | 30228-SG |

FT Mast Carrying Bags for rotatable masts (extended with handpump)

| Mast Carrying Bags internal length | Cat. No. |
|------------------------------------|----------|
| 1500 mm | 30221-SG |
| 1550 mm | 30222-SG |
| 1600 mm | 30223-SG |
| 1700 mm | 30224-SG |
| 2100 mm | 30225-SG |
| 2160 mm | 30226-SG |
| 2400 mm | 30228-SG |

FT Mast Carrying Bags for rotatable masts (manually extended)

| Mast Carrying Bags internal length | Cat. No. |
|------------------------------------|----------|
| 1450 mm | 30220-SG |
| 1500 mm | 30221-SG |
| 1550 mm | 30222-SG |

CLARK MASTS™

All details given in this publication are approximate and may be subject to change without notice.

Distributor :

TEKSAM COMPANY NV, Woudstraat 21, 3600 Genk, Belgium
 Tel : +32 (0)89 38 44 72 Fax : +32 (0)89 38 61 41 E-mail : info@teksamco.com Website : www.clarkmasts.be